


## PSU SM AU

Selectable Current Power Supply Unit  
with Battery Backup, Current Limit, Low Voltage Disconnect,  
Mains & Dynamic Battery Monitoring

# NIDAC

Security | Access Control | Solutions

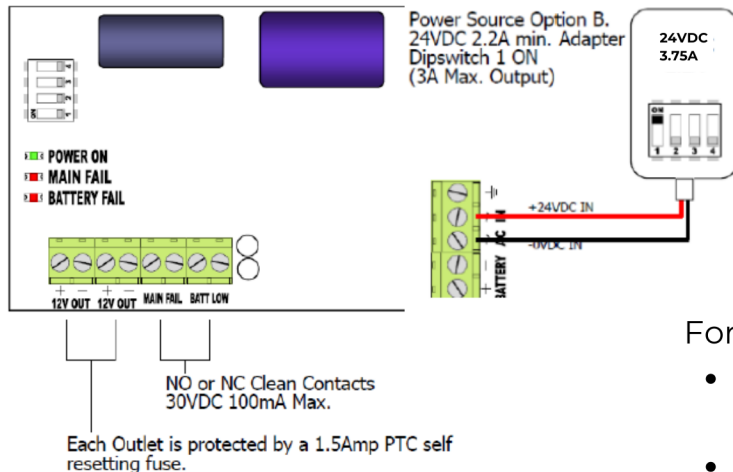

For DC plug pack

- 24VDC 2.2A min, adapter -> 24VDC 3.75A adapter
- dip switch settings, ON, OFF, OFF, ON

Dipswitch	Option
1	Off 1.5 Amp Current Limit (calibrated for 16VAC 1.5A Adapter) On 3.0 Amp Current Limit (calibrated for 24VDC 2.2A Adapter)
2	Off 250mA Max. Battery charge Current (Recommended Battery 1.3Ah to 7.5Ah) On 500mA Max. Battery charge Current (Recommended Battery 7Ah to 18Ah)
3	Off Instant Mains Fail On 15 minute Delay on Main Fail
4	Off Mains & battery output are Fail Safe (NC) On Mains & battery output are Fail Secure (NO)

**Power supply unit for:**  
NPT-DN4-PSKIT-1  
NPT-DN4-PSKIT-1-EX