



PSU SM AU

Selectable Current Power Supply Unit with Battery Backup, Current Limit, Low Voltage Disconnect, Mains & Dynamic Battery Monitoring

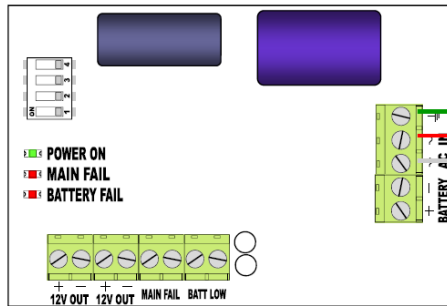


NO or NC Clean Contacts
30VDC 100mA Max.

Each Outlet is protected by a 1.5Amp PTC self resetting fuse.



Power Source Option B.
24VDC 2.2A min. Adapter
Dipswitch 1 ON
(3A Max. Output)

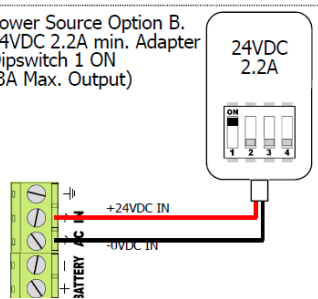

Dipswitch	Option
1	Off 1.5 Amp Current Limit (calibrated for 16VAC 1.5A Adapter) On 3.0 Amp Current Limit (calibrated for 24VDC 2.2A Adapter)
2	Off 250mA Max. Battery charge Current (Recommended Battery 1.3Ah to 7.5Ah) On 500mA Max. Battery charge Current (Recommended Battery 7Ah to 18Ah)
3	Off Instant Mains Fail On 15 minute Delay on Main Fail
4	Off Mains & battery output are Fail Safe (NC) On Mains & battery output are Fail Secure (NO)